


25005/VMP (2010)

ISA-PLAN® PRECISION RESISTOR

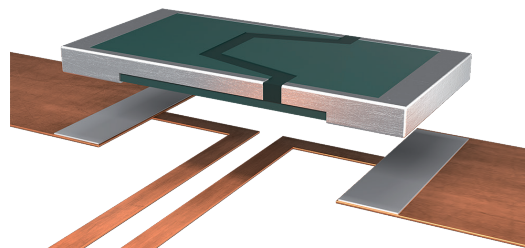

FEATURES

- Constant current up to 17 A (5 mOhm)
- 1.5 W power rating at 70 °C
- Two-terminal configuration
- Excellent temperature behavior
- Excellent heat dissipation
- High application temperature range -65 to +170 °C
- SnPb plated terminals

APPLICATIONS


- Industrial Grade / Engineering Models (Test Code A)
- Military Grade (Test Code B)
- Space Level (Test Code T)

Technical data

Resistance values	mOhm	5 to 1000		
Tolerance	%	0.5 / 1		
Temperature coefficient	ppm/K	-55°C to +25°C	+25°C to +125°C	-55°C to +125°C
		±60	±35	±50
Applicable temperature range	°C	-65 to +170		
Power rating P_{70°C}	W	1.5		
Stability (at rated power) deviation after 1000h, T_K = Terminal temperature	%	< 0.5 ($T_K=70^\circ\text{C}$)		


Ordering code Isabellenhütte

VMP - R100 - 0.5 - MT

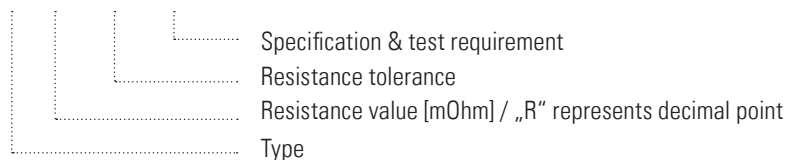

DLA Part or Identifying Number (PIN)

25005 - ***** DT

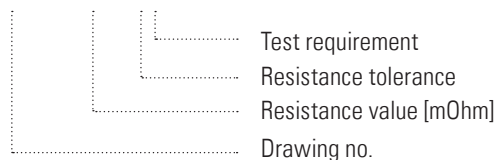


Recommended solder profile


Reflow-, IR-soldering				
Temperature	°C	260	255	217
Time	sec	peak	40	90

Tape and reel information

Specification		DIN EN 60286-3
Tape width	mm	12
Reel size	inch	13
Form of delivery		
Cut tape	pcs	up to 500
Tape and reel	pcs	>500

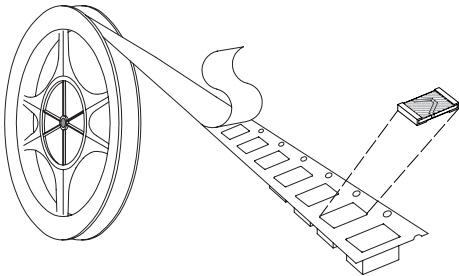

Mechanical dimensions and pcb-layout proposal (reflow-soldering) [mm]

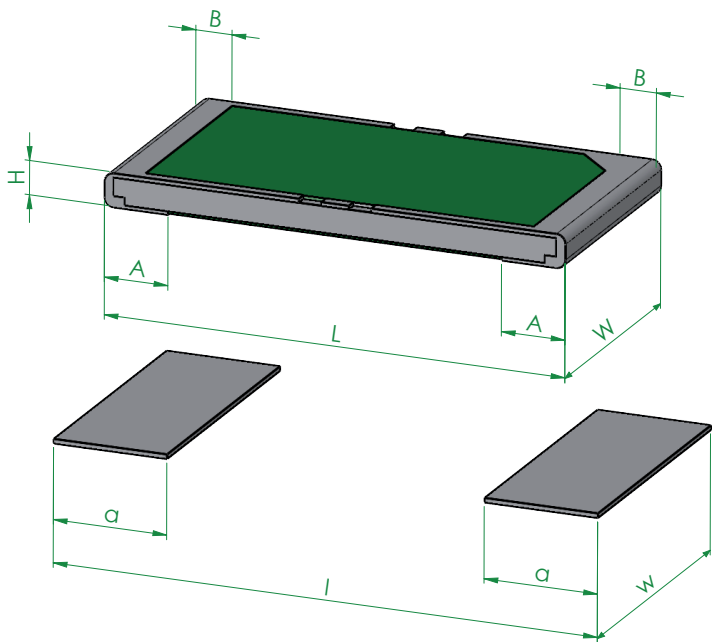

Type	L	W	H	A	B
VMP-Mx	5.08 ± 0.2	2.54 ± 0.2	0.4 ± 0.15	0.7 ± 0.2	0.4 ± 0.15

Solder pad type	l	w	a
VMP-Mx	6	3	1.25

Disclaimer // All products, product specifications and data are subject to change without notice. The product specifications do not expand or otherwise modify Isabellenhütte's terms and conditions of sale, including but not limited to, the warranty expressed therein. Isabellenhütte makes no warranty, representation or guarantee other than as set forth in its terms and conditions of sale. Information provided in datasheets and/or specifications may vary from actual results in different applications. Any statements made by Isabellenhütte regarding the suitability of products for certain types of applications are based on its knowledge of typical requirements that are often placed on its products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in the application intended. No license, express or implied, or otherwise, to any intellectual property rights is granted by this document. Any and all liability arising out of the application or use of any product shall be as set forth in Isabellenhütte's terms and conditions of sale.

Available standard resistance values and tolerances*

Version	DLA drawing no.	Test code	Test requirements acc. to MIL-PRF 32773
Industrial Grade	25005	A	Group A inspection (M Level)
Military Grade		B	Group A & Group B inspection (T Level)
Space Level		T	Group A & Group B inspection (T Level) + Life Test (1000 hrs) acc. to para 4.5 of the DLA drawing

Ordering code	PIN
VMP-R005-0.5-MA	25005-OR005DA
VMP-R005-0.5-MB	25005-OR005DB
VMP-R005-0.5-MT	25005-OR005DT
VMP-R005-1.0-MA	25005-OR005FA
VMP-R005-1.0-MB	25005-OR005FB
VMP-R005-1.0-MT	25005-OR005FT
VMP-R0068-0.5-MA	25005-R0068DA
VMP-R0068-0.5-MB	25005-R0068DB
VMP-R0068-0.5-MT	25005-R0068DT
VMP-R0068-1.0-MA	25005-R0068FA
VMP-R0068-1.0-MB	25005-R0068FB
VMP-R0068-1.0-MT	25005-R0068FT
VMP-R008-0.5-MA	25005-OR010DA
VMP-R008-0.5-MB	25005-OR010DB
VMP-R008-0.5-MT	25005-OR010DT
VMP-R008-1.0-MA	25005-OR010FA
VMP-R008-1.0-MB	25005-OR010FB
VMP-R008-1.0-MT	25005-OR010FT
VMP-R010-0.5-MA	25005-OR010DA
VMP-R010-0.5-MB	25005-OR010DB
VMP-R010-0.5-MT	25005-OR010DT
VMP-R010-1.0-MA	25005-OR010FA
VMP-R010-1.0-MB	25005-OR010FB
VMP-R010-1.0-MT	25005-OR010FT
VMP-R015-0.5-MA	25005-OR015DA
VMP-R015-0.5-MB	25005-OR015DB
VMP-R015-0.5-MT	25005-OR015DT
VMP-R015-1.0-MA	25005-OR015FA
VMP-R015-1.0-MB	25005-OR015FB
VMP-R015-1.0-MT	25005-OR015FT
VMP-R020-0.5-MA	25005-OR020DA
VMP-R020-0.5-MB	25005-OR020DB
VMP-R020-0.5-MT	25005-OR020DT
VMP-R020-1.0-MA	25005-OR020FA
VMP-R020-1.0-MB	25005-OR020FB
VMP-R020-1.0-MT	25005-OR020FT
VMP-R022-0.5-MA	25005-OR022DA
VMP-R022-0.5-MB	25005-OR022DB

Ordering code	PIN
VMP-R022-0.5-MT	25005-OR022DT
VMP-R022-1.0-MA	25005-OR022FA
VMP-R022-1.0-MB	25005-OR022FB
VMP-R022-1.0-MT	25005-OR022FT
VMP-R025-0.5-MA	25005-OR025DA
VMP-R025-0.5-MB	25005-OR025DB
VMP-R025-0.5-MT	25005-OR025DT
VMP-R025-1.0-MA	25005-OR025FA
VMP-R025-1.0-MB	25005-OR025FB
VMP-R025-1.0-MT	25005-OR025FT
VMP-R033-0.5-MA	25005-OR033DA
VMP-R033-0.5-MB	25005-OR033DB
VMP-R033-0.5-MT	25005-OR033DT
VMP-R033-1.0-MA	25005-OR033FA
VMP-R033-1.0-MB	25005-OR033FB
VMP-R033-1.0-MT	25005-OR033FT
VMP-R039-0.5-MA	25005-OR039DA
VMP-R039-0.5-MB	25005-OR039DB
VMP-R039-0.5-MT	25005-OR039DT
VMP-R039-1.0-MA	25005-OR039FA
VMP-R039-1.0-MB	25005-OR039FB
VMP-R039-1.0-MT	25005-OR039FT
VMP-R050-0.5-MA	25005-OR050DA
VMP-R050-0.5-MB	25005-OR050DB
VMP-R050-0.5-MT	25005-OR050DT
VMP-R050-1.0-MA	25005-OR050FA
VMP-R050-1.0-MB	25005-OR050FB
VMP-R050-1.0-MT	25005-OR050FT
VMP-R068-0.5-MA	25005-OR056DA
VMP-R058-0.5-MB	25005-OR056DB
VMP-R068-0.5-MT	25005-OR056DT
VMP-R068-1.0-MA	25005-OR056FA
VMP-R068-1.0-MB	25005-OR056FB
VMP-R068-1.0-MT	25005-OR056FT
VMP-R100-0.5-MA	25005-OR100DA
VMP-R100-0.5-MB	25005-OR100DB
VMP-R100-0.5-MT	25005-OR100DT
VMP-R100-1.0-MA	25005-OR100FA

Ordering code	PIN
VMP-R100-1.0-MB	25005-OR100FB
VMP-R100-1.0-MT	25005-OR100FT
VMP-R120-0.5-MA	25005-OR120DA
VMP-R120-0.5-MB	25005-OR120DB
VMP-R120-0.5-MT	25005-OR120DT
VMP-R120-1.0-MA	25005-OR120FA
VMP-R120-1.0-MB	25005-OR120FB
VMP-R120-1.0-MT	25005-OR120FT
VMP-R150-0.5-MA	25005-OR150DA
VMP-R150-0.5-MB	25005-OR150DB
VMP-R150-0.5-MT	25005-OR150DT
VMP-R150-1.0-MA	25005-OR150FA
VMP-R150-1.0-MB	25005-OR150FB
VMP-R150-1.0-MT	25005-OR150FT
VMP-R160-0.5-MA	25005-OR160DA
VMP-R160-0.5-MB	25005-OR160DB
VMP-R160-0.5-MT	25005-OR160DT
VMP-R160-1.0-MA	25005-OR160FA
VMP-R160-1.0-MB	25005-OR160FB
VMP-R160-1.0-MT	25005-OR160FT
VMP-R180-0.5-MA	25005-OR180DA
VMP-R180-0.5-MB	25005-OR180DB
VMP-R180-0.5-MT	25005-OR180DT
VMP-R180-1.0-MA	25005-OR180FA
VMP-R180-1.0-MB	25005-OR180FB
VMP-R180-1.0-MT	25005-OR180FT
VMP-R200-0.5-MA	25005-OR200DA
VMP-R200-0.5-MB	25005-OR200DB
VMP-R200-0.5-MT	25005-OR200DT
VMP-R200-1.0-MA	25005-OR200FA
VMP-R200-1.0-MB	25005-OR200FB
VMP-R200-1.0-MT	25005-OR200FT
VMP-R250-0.5-MA	25005-OR220DA
VMP-R250-0.5-MB	25005-OR220DB
VMP-R250-0.5-MT	25005-OR220DT
VMP-R250-1.0-MA	25005-OR220FA
VMP-R250-1.0-MB	25005-OR220FB
VMP-R250-1.0-MT	25005-OR220FT
VMP-R270-0.5-MA	25005-OR270DA
VMP-R270-0.5-MB	25005-OR270DB
VMP-R270-0.5-MT	25005-OR270DT
VMP-R270-1.0-MA	25005-OR270FA
VMP-R270-1.0-MB	25005-OR270FB
VMP-R270-1.0-MT	25005-OR270FT

Ordering code	PIN
VMP-R300-0.5-MA	25005-OR300DA
VMP-R300-0.5-MB	25005-OR300DB
VMP-R300-0.5-MT	25005-OR300DT
VMP-R300-1.0-MA	25005-OR300FA
VMP-R300-1.0-MB	25005-OR300FB
VMP-R300-1.0-MT	25005-OR300FT
VMP-R390-0.5-MA	25005-OR390DA
VMP-R390-0.5-MB	25005-OR390DB
VMP-R390-0.5-MT	25005-OR390DT
VMP-R390-1.0-MA	25005-OR390FA
VMP-R390-1.0-MB	25005-OR390FB
VMP-R390-1.0-MT	25005-OR390FT
VMP-R470-0.5-MA	25005-OR470DA
VMP-R470-0.5-MB	25005-OR470DB
VMP-R470-0.5-MT	25005-OR470DT
VMP-R470-1.0-MA	25005-OR470FA
VMP-R470-1.0-MB	25005-OR470FB
VMP-R470-1.0-MT	25005-OR470FT
VMP-R500-0.5-MA	25005-OR500DA
VMP-R500-0.5-MB	25005-OR500DB
VMP-R500-0.5-MT	25005-OR500DT
VMP-R500-1.0-MA	25005-OR500FA
VMP-R500-1.0-MB	25005-OR500FB
VMP-R500-1.0-MT	25005-OR500FT
VMP-R560-0.5-MA	25005-OR560DA
VMP-R560-0.5-MB	25005-OR560DB
VMP-R560-0.5-MT	25005-OR560DT
VMP-R560-1.0-MA	25005-OR560FA
VMP-R560-1.0-MB	25005-OR560FB
VMP-R560-1.0-MT	25005-OR560FT
VMP-R820-0.5-MA	25005-OR820DA
VMP-R820-0.5-MB	25005-OR820DB
VMP-R820-0.5-MT	25005-OR820DT
VMP-R820-1.0-MA	25005-OR820FA
VMP-R820-1.0-MB	25005-OR820FB
VMP-R820-1.0-MT	25005-OR820FT
VMP-1R00-0.5-MA	25005-1R000DA
VMP-1R00-0.5-MB	25005-1R000DB
VMP-1R00-0.5-MT	25005-1R000DT
VMP-1R00-1.0-MA	25005-1R000FA
VMP-1R00-1.0-MB	25005-1R000FB
VMP-1R00-1.0-MT	25005-1R000FT

* Further values on request

